

SILIKAL® System D Cold Room Flex
Flexible self-levelling MMA system with quartz broadcast
and waterproofing membrane.

SILIKAL® System D Cold Room Flex



Expect more from your floor.

SILIKAL® System D Cold Room Flex is a fast-curing MMA flooring system engineered for sub-zero environments. It includes an integrated Class III elastomeric membrane (tested to AS 4654.1 and AS/NZS 4858) providing waterproofing to reduce the risk of water ingress through the slab and superior crack-bridging against building movement, as well as a flexible, hard-wearing layer to withstand mechanical stress and thermal loads. The system minimises downtime with a rapid one-hour cure, even at -25°C, making it a practical solution for demanding environments.

Uses

- ▶ Sub-zero cool rooms, freezers, and cold storage facilities (Operating temperatures between -25°C and 0°C)

Advantages

- ▶ 1-hour cure down to -25°C: Reaches full curing in one hour. Can be installed in active freezers without turning off refrigeration systems.
- ▶ Excellent chemical resistance
- ▶ High mechanical resistance
- ▶ Variable slip resistance
- ▶ Seamless and hygienic finish
- ▶ Easy to clean and maintain
- ▶ Certified by HACCP International
- ▶ Outstanding resistance to ageing and weathering
- ▶ Application is possible on various substrates
- ▶ Good UV resistance
- ▶ Various colours

System configuration

Flexible Top Coat


Silikal Quartz Broadcast

Silikal Main Coat

Silikal Membrane

Silikal Primer

Base

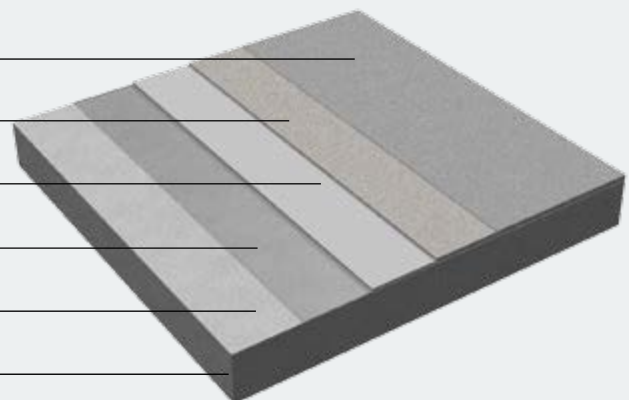

Certified Quality and Ecology
Management Systems
Reg. No. 73 100 / 104 663



Our systems comply
with the Halal
european guidelines



Our systems are certified
by HACCP international

SILIKAL® System D Cold Room Flex

Flexible MMA quartz system with waterproofing membrane

Substrate requirements

Cementitious substrates must be free of laitance, dust, oil, fat, grease and other contamination. The substrate should have a compressive strength of minimum 25 N/mm², a pull-off strength of at least 1.5 N/mm². The substrate must be dry and the moisture content below 4 CM-%. An adequate damp proof membrane must be installed underneath of the concrete slab.

Products

- ▶ Silikal Standard Primer like SILIKAL® Resin RU380 (Primer depends on the substrate. Please refer to the Silikal Primer Table or contact our technical department.)
- ▶ Membrane like SILIKAL® Resin RU321 pigmented or comparable
- ▶ Silikal Main Coat consists of SILIKAL® Resin RU368 or comparable, mixed with SILIKAL® Filler SL.
- ▶ Silikal Quartz for Slip-Resistance
- ▶ Silikal Top Coat like SILIKAL® Resin R6200, R62 or comparable

For complete technical details, material consumption, hardener quantities, guideline recipes please refer to the latest Silikal Technical Documentation and Product Data Sheet of the relevant products or consult our technical department.

Technical Data

Curing time:	1 hour
Slip resistance:	R11 to R13 (DIN 51130) depending on the clients requirements
Compressive strength:	35 N/mm ² (DIN 1164)
Tensile strength:	15 N/mm ² (DIN 1164)
Flexural strength:	10 N/mm ² (EN ISO 527-2)
Abrasion resistance:	Class AR 1 – Heavy duty
Temperature resistance:	-25 °C to +45 °C (Non-operating/Defrost) and +60 °C for short periods (e.g. for cleaning purposes)
Chemical resistance:	Refer to Silikal Chemical Resistance Table
Water Vapour Permeability:	Class II (EN ISO 7783-2)
Fire behaviour:	E _n (EN ISO 13501-1)
Thickness:	4 – 6 mm
Colour Range:	See adjacent colour options

Application

Only approved applicators, licensed by Silikal should be used for application. Please contact Silikal to obtain details of your local qualified applicator.

Cleaning and Maintenance

Please refer to our Silikal Cleaning Manual.

Safety and Hygiene

SILIKAL® System D Cold Room Flex is in compliance with regulation (EC) 1935/2004 on materials intended to come into contact with food and repealing directives (ISEGA) and certified by HACCP International. For food processing companies it is essential to use a floor coating like the Silikal systems which fulfill the criteria of HACCP in terms of hygiene and food safety. Please refer to most recent Material Safety Data Sheets for chemical, physical and other safety-related data.

Warranty

Silikal warrants that materials shipped to buyers are at the time of shipment substantially free from material defects and will perform according to Silikal published literature if used strictly in accordance with Silikal's prescribed procedures.

Service

For further information or support please contact Silikal directly.



Colour Options

